

## SPECIFICATION FOR APPROVAL

<p><b>CUSTOMER'S APPROVAL CHOP</b></p>  <p>Approval's condition: _____</p> <p>Approved date: _____</p>
--

KINDLY RETURN A SET WITH YOUR COMPANY'S OFFICIAL STAMP  
ON APPROVAL OF THIS ITEM

**CUSTOMER'S NAME:** \_\_\_\_\_

**CUSTOMER'S MODEL NO. :** \_\_\_\_\_

**CUSTOMER'S PART NO. :** \_\_\_\_\_

**DESCRIPTION:** **Dielectric Filter**

**Semitel'S MODEL NO. :** **SE8R3600B400\_25.7\_054**

**VERSION:** **A**

**DATE:** **2025/1/20**

- Attachments:**
- Product Specification
  - Sample Qty. :
  - Test Data

Prepared By	Checked By	Approved By
Hebe Deng 2025/1/20	Liang Wong 2025/1/20	Eric Chang 2025/1/20

Semitel International Ltd.,	TEL: 886-2-86922121      FAX: 886-2-26483379
www.semitelint.com	12F, No.183, Sec.1, Datong Rd., Xizhi Dist., New Taipei City 22145, Taiwan



## FEATURES

- Small Size, Light weight
- SMT package soldering
- Ideal for Microwave telecommunication

## SPECIFICATIONS

ELECTRICAL SPECIFICATIONS			
NO.	ITEM	SPEC	UNIT
1	Center Frequency [fo]	3600	MHz
2	Bandwidth [BW]	fo±200[3400~3800]	MHz
3	Insertion Loss in BW	2.2 max.	dB
4	Ripple in BW	1.2 max.	dB
5	Return Loss in BW (S11, S22)	15 min.	dB
6	Attenuation[Absolute Value]	50 dB min. @ DC~3000 MHz	dB
		40 dB min. @ 3000~3300 MHz	
		25 dB min. @ 3300~3360 MHz	
		25 dB min. @ 3840~3910 MHz	
		40 dB min. @ 3910~4200 MHz	
		50 dB min. @ 4200~5000 MHz	
7	In/Out Impedance	50	Ω
8	[Operation Temperature Range]	-40℃ to +105℃	

^ All Parameters are measured with 50Ω system at +25℃ if not specified.


Semitel'S MODEL NO. :	SE8R3600B400_25.7_054	CUSTOMER'S MODEL NO. :	
VERSION:	A	CUSTOMER'S PART NO. :	
DATE:	2025/1/20		

### 3. OUTLINE DRAWING

#### 3.1. Filter drawing

#### 3.2. SE8R3600B400\_25.7\_054

(marking showing 3600Bxxx, xxx=01~99 mean for project series code.)

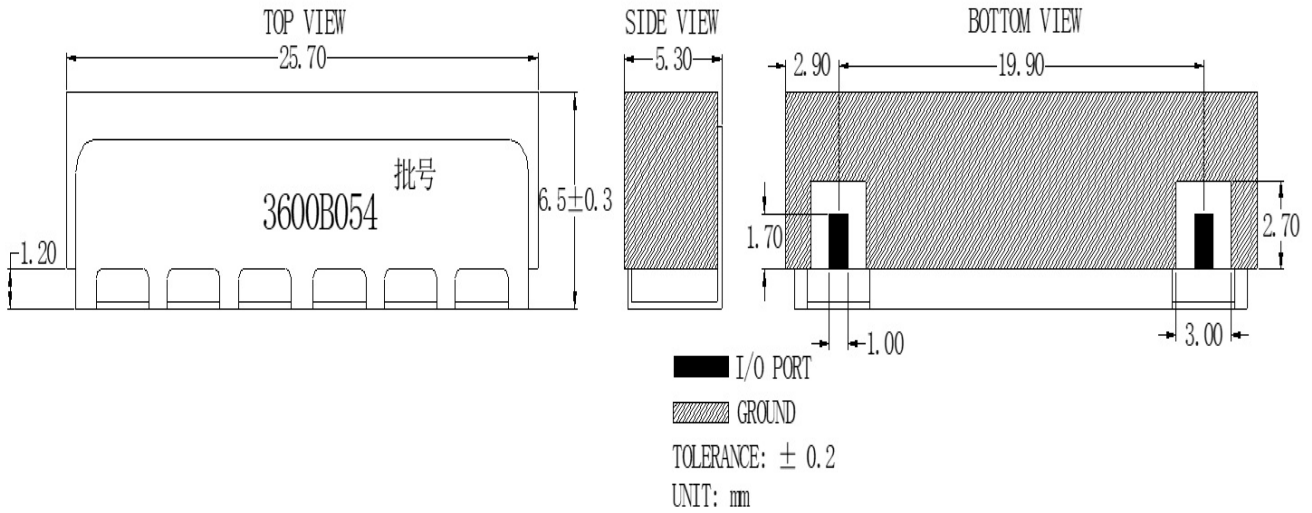


### 4. RECOMMENDED PC BOARD PATTERN



Semitel'S MODEL NO. :	SE8R3600B400_25.7_054	CUSTOMER'S MODEL NO. :	
VERSION:	A	CUSTOMER'S PART NO. :	
DATE:	2025/1/20		

## 5.FREQUENCY RESPONSE

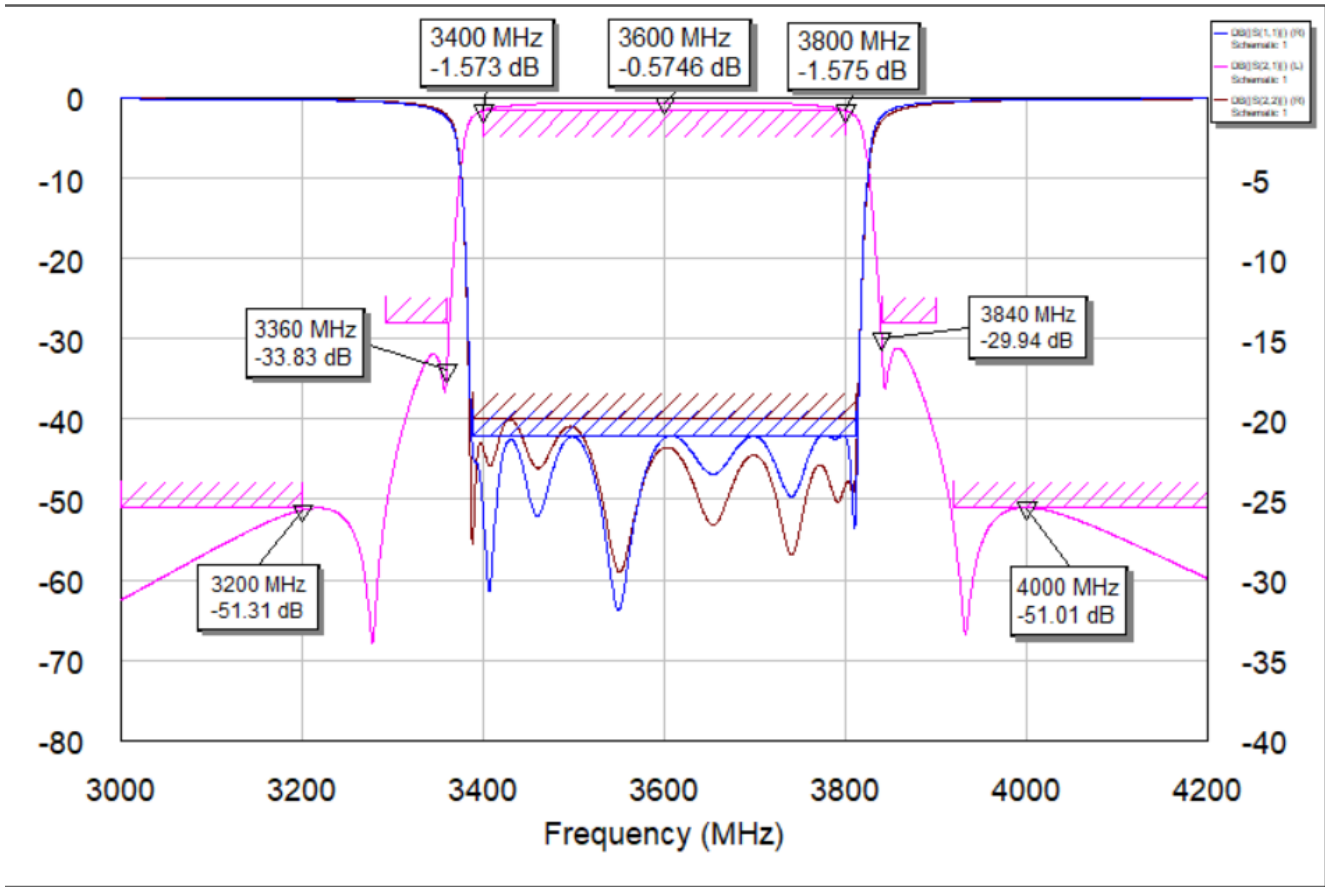

Semitel'S MODEL NO. :	SE8R3600B400_25.7_054	CUSTOMER'S MODEL NO. :	
VERSION:	A	CUSTOMER'S PART NO. :	
DATE:	2025/1/20		

## 6.Environmental Test

### 6.1 Vibration Resist

The device should satisfy the electrical characteristics after applied to the vibration of 10 to 55Hz with amplitude of 1.5mm for 2 hours each in X, Y and Z directions.

### 6.2 Steady Damp Heat Test

The device should satisfy the electrical characteristics after exposed to the temperature 40

±2°C and the relative humidity 90~95% RH for 96 hours and 1~2 hours recovery time under normal condition.

### 6.3 High Temperature Storage

The device should satisfy the electrical characteristics after exposed to temperature 85±

5°Cf or 96±2 hours and 1~2 hours recovery time under normal temperature.

### 6.4 Low Temperature Storage

The device should also satisfy the electrical characteristics after exposed to the temperature

-40°C±5°C for 96±2 hours and to 2 hours recovery time under normal temperature.

### 6.5 Thermal Shock


The device should also satisfy the electrical characteristics after exposed to the low temperature -40°C and high temperature +85°C for 30±2 min each by 5 cycles and 1 to 2 hours recovery time under normal temperature.

Semitel'S MODEL NO. :	SE8R3600B400_25.7_054	CUSTOMER'S MODEL NO. :	
VERSION:	A	CUSTOMER'S PART NO. :	
DATE:	2025/1/20		

## 7. Notice

1. RoHS 2.0
2. MSL-1
3. Reflow temperature recommendation

Profile feature		Pb-Free Assembly(SnAgCu)
PREHEAT	Temperature Min(Tsmin)	150°C
	Temperature Max(Tsmax)	200°C
	Time(ts) (from Tsmin to Tsmax)	60-120 seconds
RAMP-UP	Ramp-up rate (TL to TP)	3 °C/second max.
REFLOW	Liquidus Temperature(TL)	217°C
	Total Time maintained above TL (t L)	30-100 seconds
PEAK	Temperature(TP)	250°C
	Time (tp)	25 seconds
RAMP-DOWN	Ramp-down rate (TP to TL)	6 °C / second max.
Time (from 25°C to Peak Temperature) 25°C		8 minutes max.

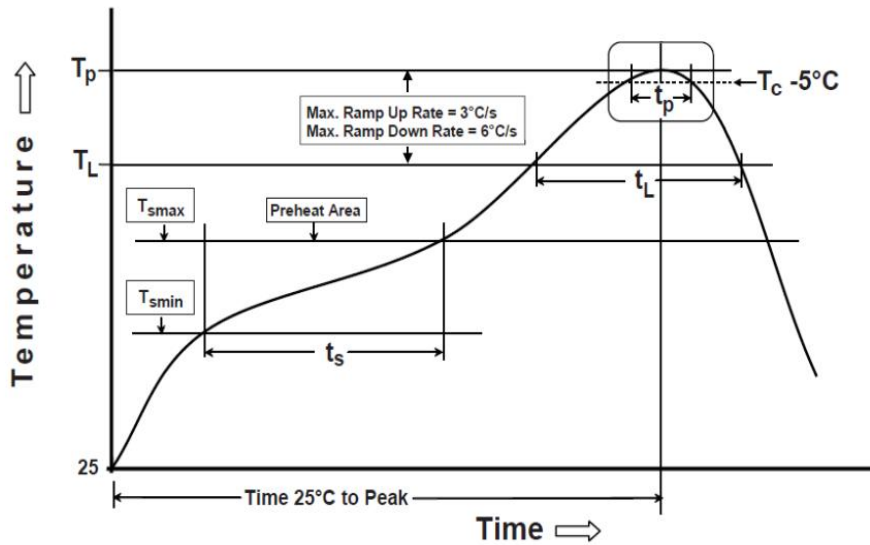

This product may not be used in the following environments:

1. Ambient air containing corrosive gas and volatile or combustible gas.
2. In liquid and in environments with a high concentration of airborne particles.

Semitel'S MODEL NO. :	SE8R3600B400_25.7_054	CUSTOMER'S MODEL NO. :	
VERSION:	A	CUSTOMER'S PART NO. :	
DATE:	2025/1/20		